

Kraft Series

Electric Puller

ELECTRIC PULLER 3,300LB

Kraft means Force.

The Stärke Kraft includes German engineering and design aspects which power over the competition in strength, versatility and usability. This electric puller tug was ergonomically designed as a compact, easy to maneuver unit capable of pulling up to 3,300 lbs across your warehouse, factory or distribution facility.

FEATURES

Towing Capacity

• 3300 lbs

Wheels

- Front Pneumatic
- Back Rubber

Weight with Battery

• 330 lbs

Battery

- Built-in charger
- 24/80aH

Controls

- Fingertip control
- Emergency stop device
- Step-less speed control

Frame

- Compact design, built for easy
- Ergonomically designed handle
- Length 66.7"
- Width 28.4"
- Turning radius 50.8"

Powertrain/electrical

- DC brushless motor
- Travel speed 3.4 mph unloaded, 3 mph loaded







UTT15W




Kraft Series

Electric Puller

ELECTRIC PULLER 3,300LB


Why Choose a Stärke Kraft over a competitor?

| Puller | Stärke Kraft | Mobile TUG 15 | ADS Xpress Plus 200 |
|--------------|--------------|---------------|---------------------|
| Tow Capacity | 3,300 lbs | 1,500 lbs | 1,500 lbs |
| Drawbar Pull | 300 lbs | N/A | 250 lbs |





| Kraft Electric Puller | | UTT15W | |
|--|------------------|------------------|------------------|
| Capacity | | lbs | 3,300 |
| Rated Drawbar Pull | | | 300 |
| Wheelbase | | y (in) | 15.6 |
| Axle loading, unladen | Front | lbs | 235.4 |
| Axle loading, unladen | Rear | lbs | 94.6 |
| Tire Size | Front, pneumatic | | 16 x 6.5-8.00 |
| | Rear, rubber | | 5.0 |
| Wheels, number front/rear (x=drive wheels) | | | 2x/1 |
| Tread | Front | b10 (in) | 21.9 |
| Height of Tiller in drive position | | h14 (in) | 35.0 |
| Draw Chassis height | | h10 (in) | 7.0 x 8.6 x 10.2 |
| Overall length | | l1 (in) | 66.7 |
| Overall width | | b1 (in) | 28.4 |
| Ground clearance | | m2 (in) | 3.9 |
| Turning radius | | Wa (in) | 50.8 |
| Travel Speed | Laden | mph | 3.0 |
| Travel Speed | Unladen | mph | 3.4 |
| Drawbar pull | Laden/Unladen | Ν | 300 |
| Drawbar pull (max) | Laden/Unladen | Ν | 1000 |
| Brake | | | electric |
| Battery Voltage | | v/Ah | 24/80 |
| Battery Weight | | lbs | 107.8 |
| Battery Dimensions L x W x H | | in | 10.2 x 6.7 x 8.5 |
| Type of Drive Control | | mosfet | |
| Battery Compartment Size | in | 10.6 x 7.0 x 8.9 | |
| Service Weight with battery | | lbs | 330 |

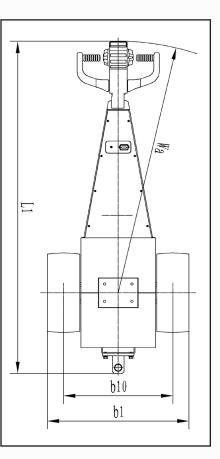

Meets or exceeds ASME B56.1 and CSA B335 Standards. Specifications are subject to change without notice. Rev 11/2016

MATERIAL HANDLING GROUP

www.starkeforklift.com • 1-877-435-4352 • sales@starkeforklift.com